




K2PL

1/2HP & 2HP Dewatering Pump

- 1/4" Solids Handling
- 2" NPT Vertical Discharge
- Double Mechanical Seals
- Durable Cast Iron Construction
- Automatic and Manual Models

PUMP SERIES	K2PL		1/2HP - 2HP RECESSED IMPELLER	
Speed	3450 RPM	Discharge	2"	FULL IMPEL-

GPM: _____ TDH: _____

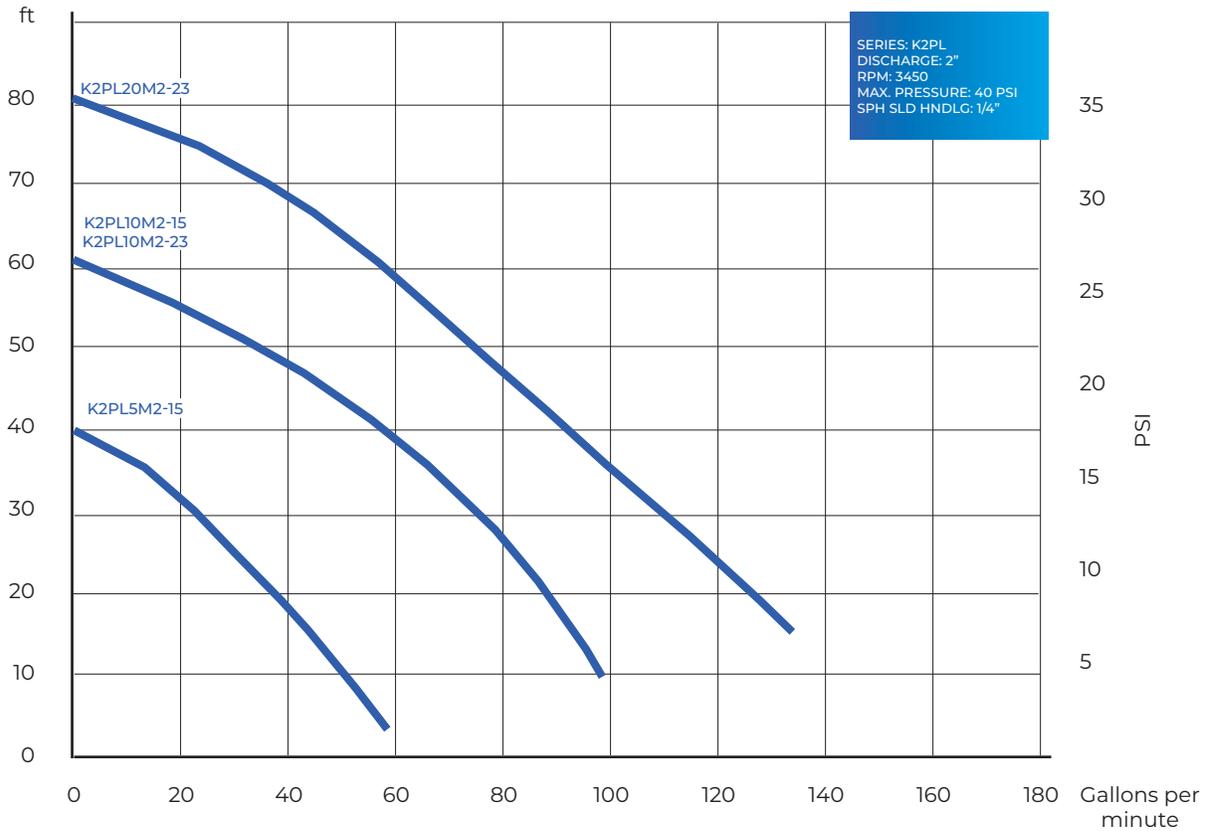

MODEL	HP	VOLTS	PHASE	RPM	MAX AMPS	CORD	A	B	C	D	E	WEIGHT (POUNDS)
K2PL5M2-15	0.5	115	1	3450	3.6	16AWG/3C	13.86"	9.57"	7"	4.25"	4.61"	26
K2PL5M2-15A	0.5	115	1	3450	6.6	16AWG/3C	13.86"	9.57"	7"	4.25"	4.61"	27
K2PL10M2-15	1	115	1	3450	12	16AWG/3C	14.84"	10.98"	7"	4.75"	5.24"	33
K2PL10M2-15A	1	115	1	3450	12	16AWG/3C	14.84"	10.98"	7"	4.75"	5.24"	34
K2PL10M2-23	1	230	3	3450	4	16AWG/3C	14.84"	10.98"	7"	4.75"	5.24"	33
K2PL20M2-23	2	230	3	3450	7	14AWG/4C	18.27"	12.32"	7.5"	5.13"	6.1"	42

IMPORTANT!

1. Never use this pump to handle explosive liquids.
2. This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common.
3. Pump may be operated "dry" for extended periods without damage to motor and/or seals.
4. Testing is performed with water specific gravity of 1.0 @ 68°F (20°C); other fluids may vary performance.