




## K2PLEN

1/2HP & 1HP Sewage Pump

- 1.37" Solids Handling
- 2" NPT Vertical Discharge
- Double Mechanical Seals
- Durable Cast Iron Construction
- Automatic and Manual Models

PUMP SERIES	K2PLEN		1/2HP & 1HP RECESSED IMPELLER	
Speed	3450 RPM	Discharge	2"	FULL IMPELLER

GPM: \_\_\_\_\_ TDH: \_\_\_\_\_

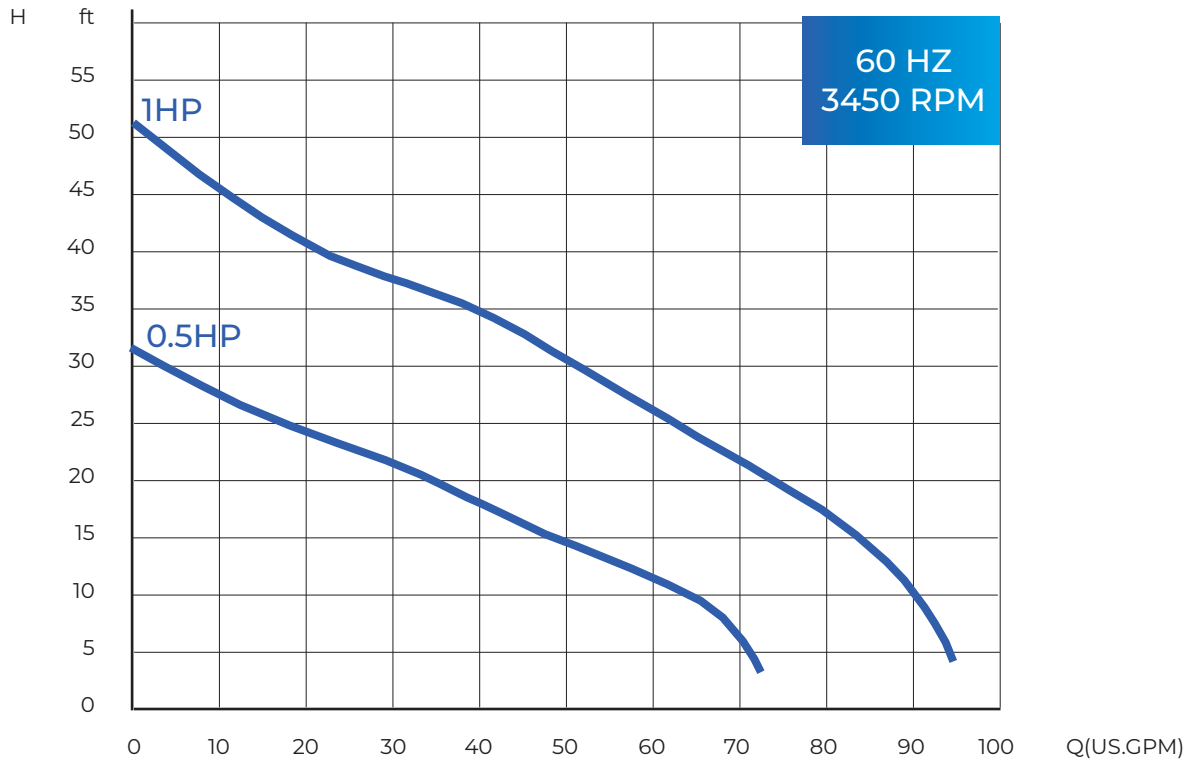

MODEL	HP	VOLTS	PH	AMPS	RATED	RATED		MAX.	
						FT	GPM	FT	GPM
K2PLEN-51A	0.5	115	1	6.6	3450	19.7	35	31	73
K2PLEN-101A	1	115	1	12	3450	33	45	50.8	95
K2PLEN-102A	1	230	1	6	3450	33	45	50.8	95
K2PLEN-103	1	230	3	4	3450	33	45	50.8	95

**IMPORTANT!**

1. Never use this pump to handle explosive liquids.
2. This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common.
3. Pump may be operated "dry" for extended periods without damage to motor and/or seals.
4. Testing is performed with water specific gravity of 1.0 @ 68°F (20°C); other fluids may vary performance.