


PUMP SERIES	K2PLSE		4/10 & 1/2HP RECESSED IMPELLER	
Speed	1750 RPM	Discharge	2"	FULL IMPELLER

GPM: _____ TDH: _____

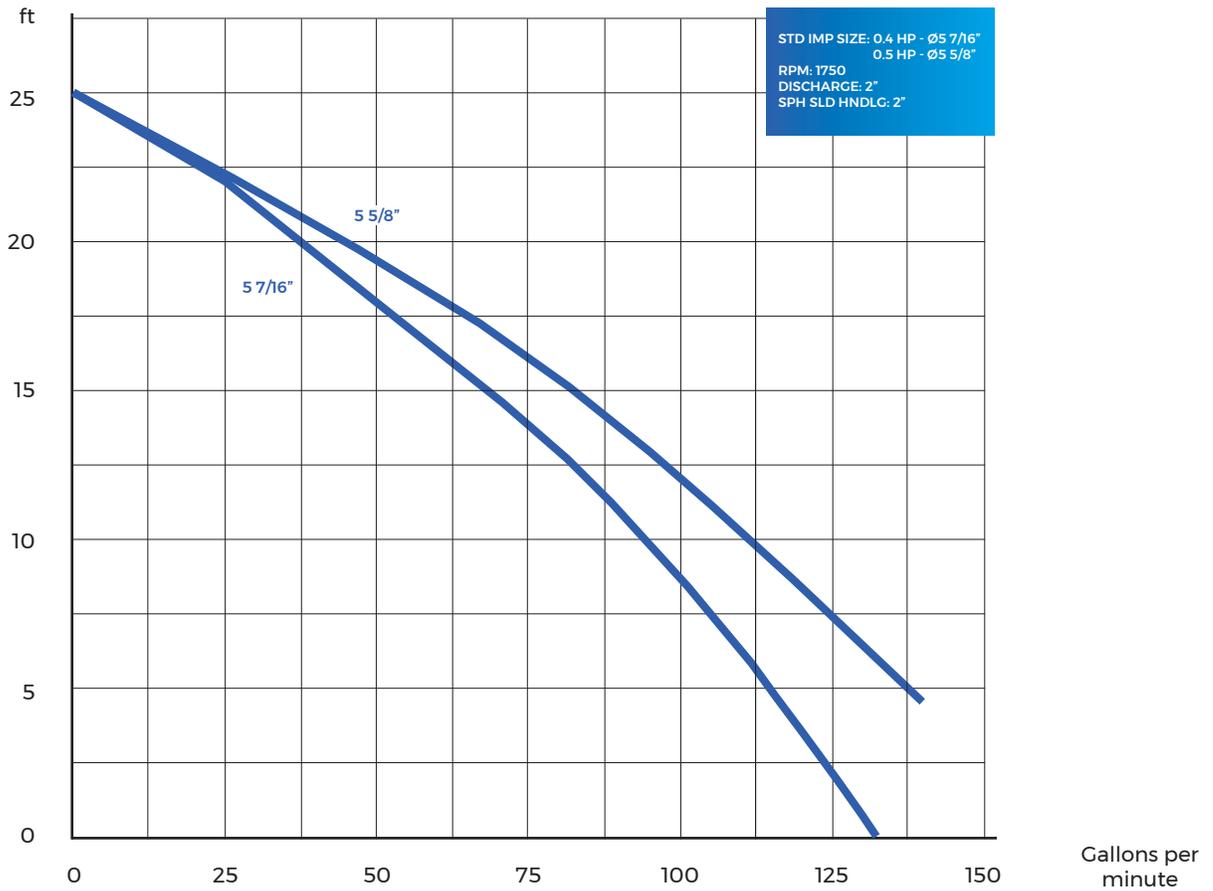

MODEL	HP	VOLTS	PHASE	RPM	MAX AMPS	LOCKED ROTOR AMPS	CORD SIZE	CORD TYPE	WEIGHT (POUNDS)
K2PLSE411	0.4	115	1	1750	12	22.5	14/3	SJTOW	53
K2PLSE411A	0.4	115	1	1750	12	22.5	14/3	SJTOW	53
K2PLSE421	0.4	230	1	1750	6.1	9.3	14/3	SJTOW	53
K2PLSE511A	0.4	115	1	1750	12	22.5	14/3	SJTOW	53

IMPORTANT!

1. Never use this pump to handle explosive liquids.
2. This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common.
3. Pump may be operated "dry" for extended periods without damage to motor and/or seals.
4. Testing is performed with water specific gravity of 1.0 @ 68°F (20°C); other fluids may vary performance.