



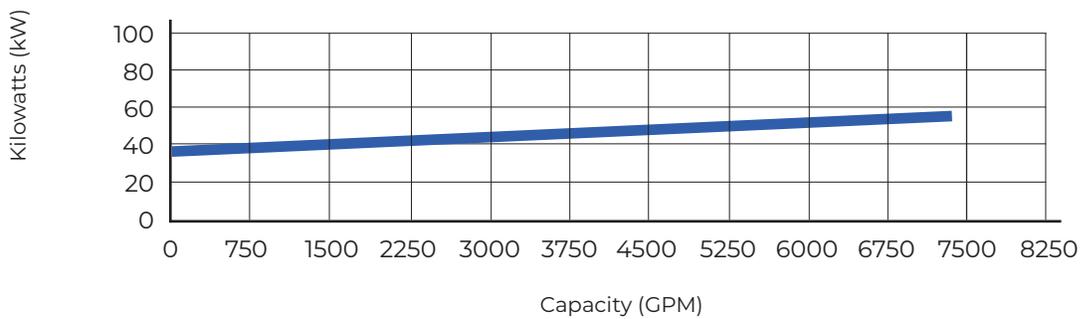



GENERAL		MOTOR DATA			
Pump Model	K16H750M8-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	75 HP / 119 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	8P / 870 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				

	HEAD (FT)	CAPACITY	KILOWATTS [kW]	EFFICIENCY [%]
Best Efficiency Point	32	5425	51	65

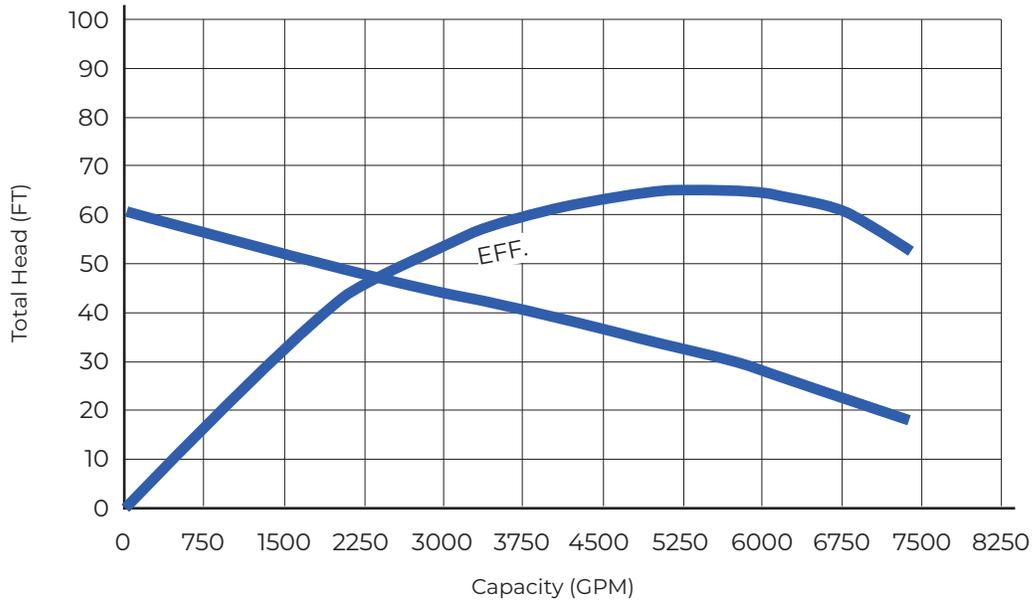

GENERAL		MOTOR DATA			
Pump Model	K16H1000M8-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	100 HP / 155 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	8P / 870 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				



	HEAD (FT)	CAPACITY	KILOWATTS [kW]	EFFICIENCY [%]
Best Efficiency Point	40	5500	63	72

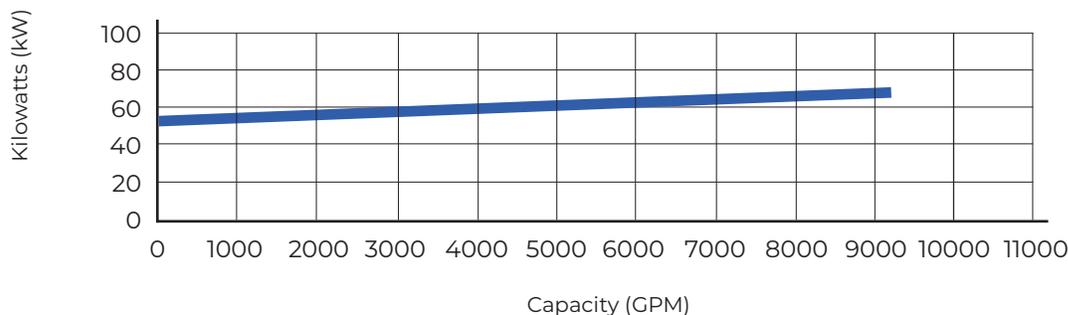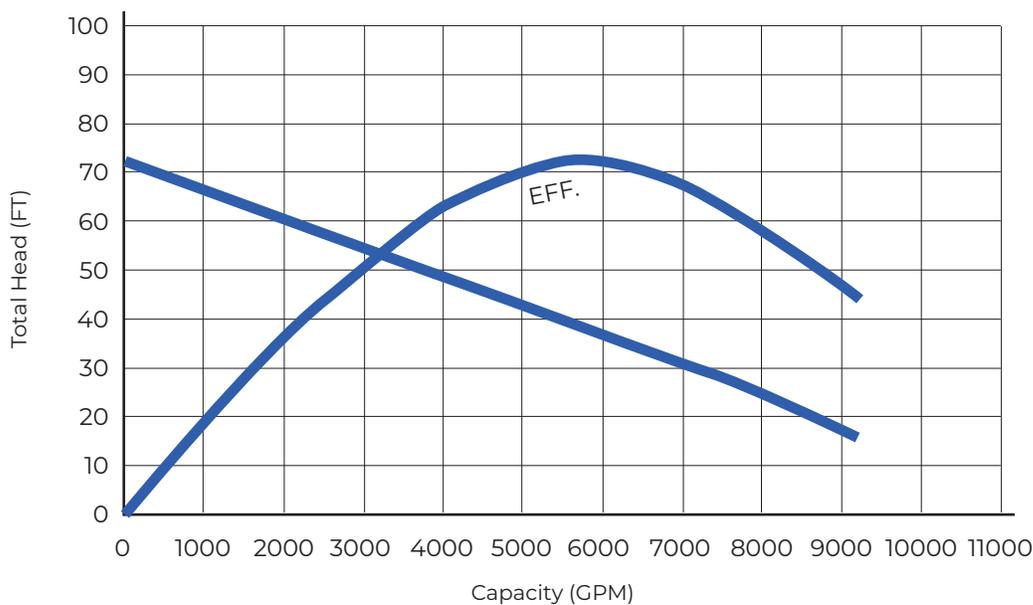





GENERAL		MOTOR DATA			
Pump Model	K16H1250M6-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	125 HP / 192 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	6P / 1150 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				

	HEAD (FT)	CAPACITY	KILOWATTS [KW]	EFFICIENCY [%]
Best Efficiency Point	48	6500	95	62

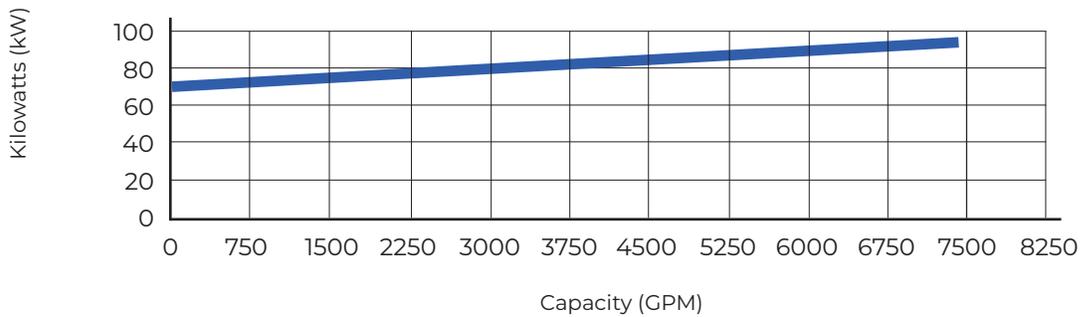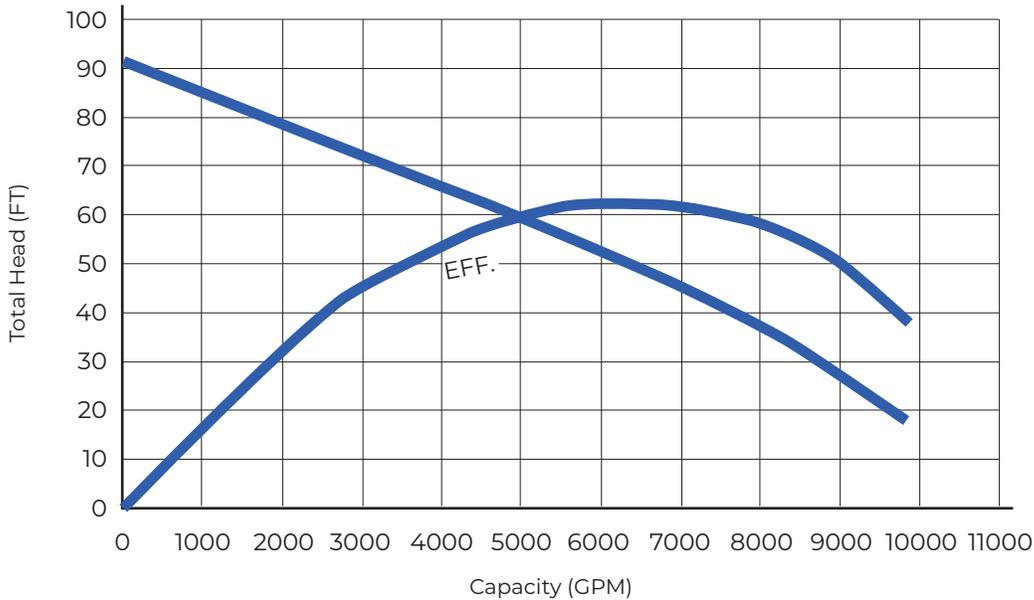

GENERAL		MOTOR DATA			
Pump Model	K16H1500M6-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	150 HP / 237 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	6P / 1150 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				



	HEAD (FT)	CAPACITY	KILOWATTS [kW]	EFFICIENCY [%]
Best Efficiency Point	72	7480	117	65

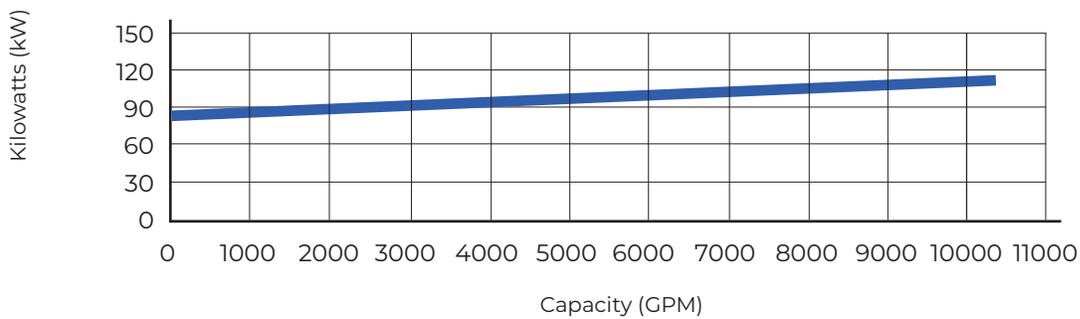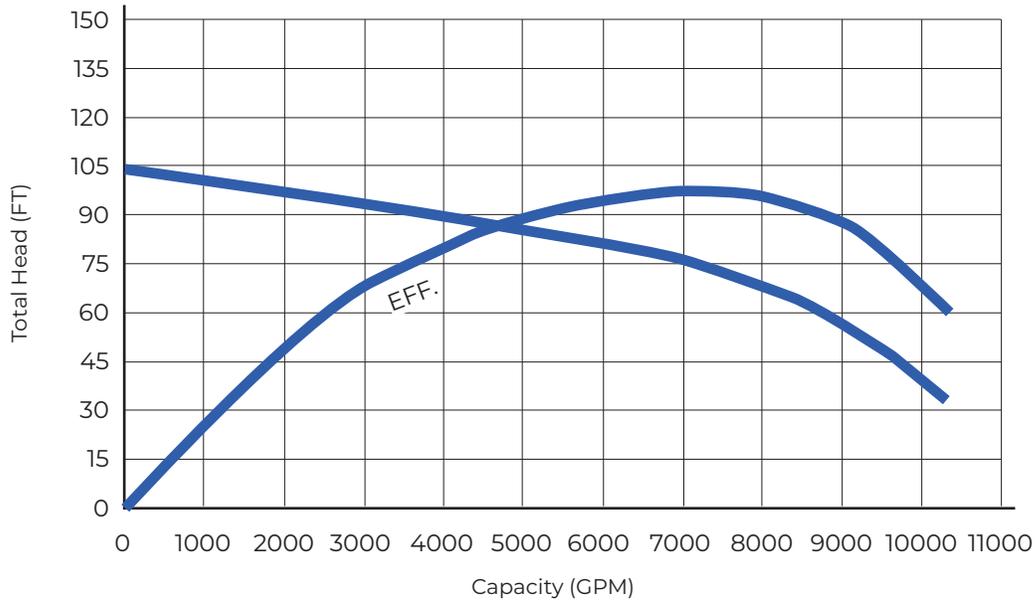





GENERAL		MOTOR DATA			
Pump Model	K16H2000M6-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	200 HP / 288 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	6P / 1150 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				

	HEAD (FT)	CAPACITY	KILOWATTS [KW]	EFFICIENCY [%]
Best Efficiency Point	63	7435	132	66

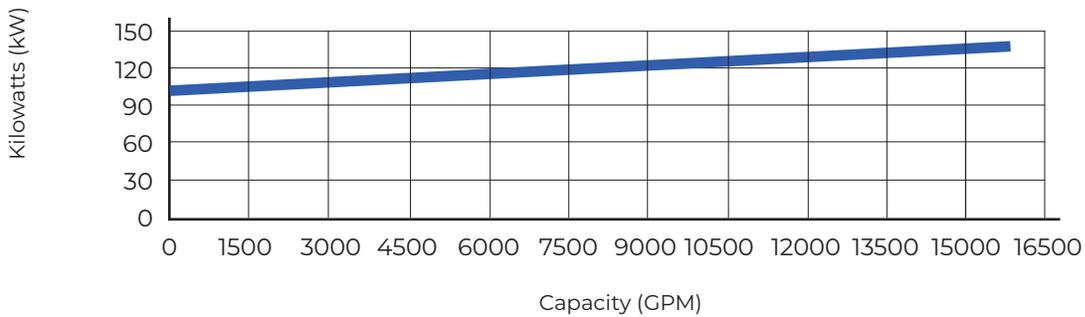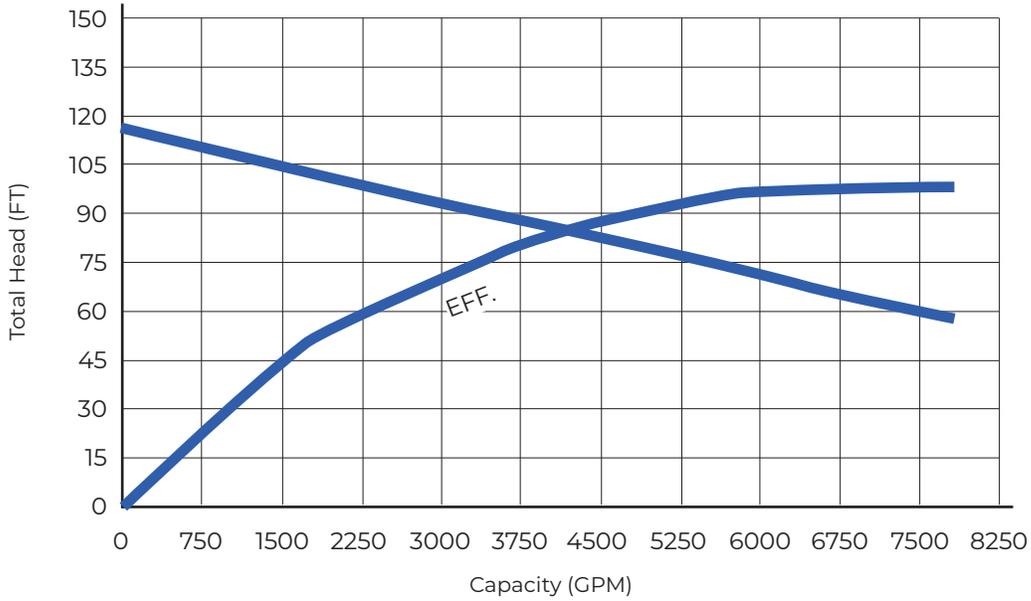

GENERAL		MOTOR DATA			
Pump Model	K16H2500M6-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	250 HP / 428 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	6P / 1150 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				

	HEAD (FT)	CAPACITY	KILOWATTS [kW]	EFFICIENCY [%]
Best Efficiency Point	75	9055	196	65

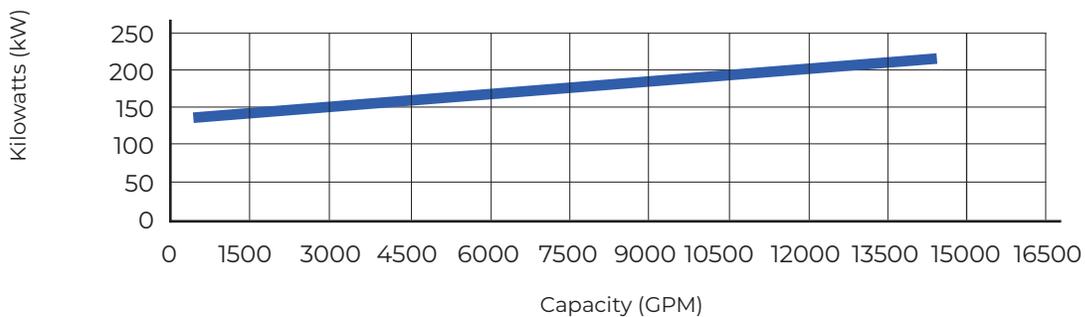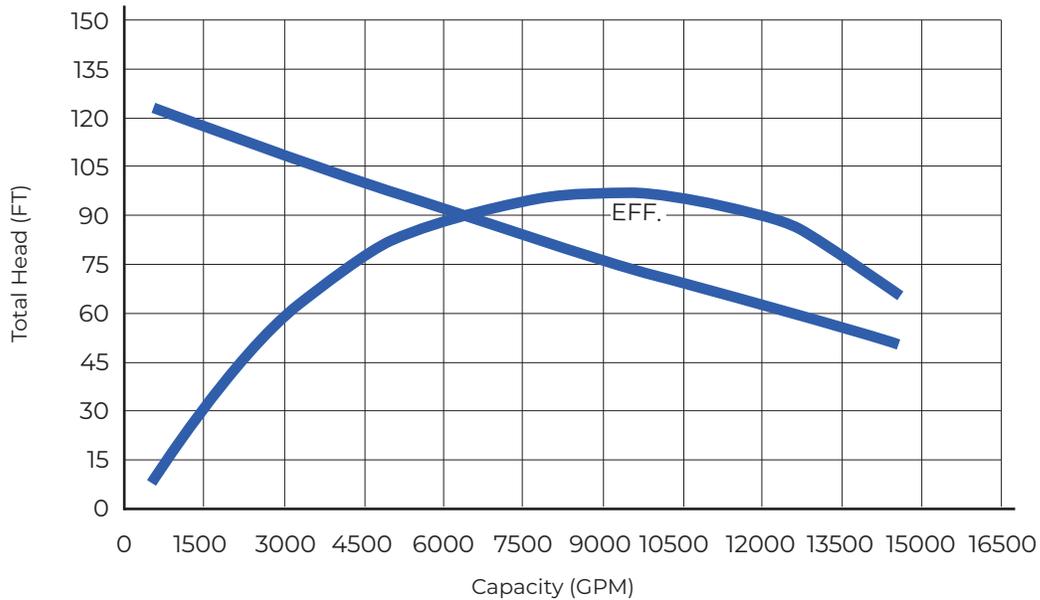



GENERAL		MOTOR DATA			
Pump Model	K16H4250M4-43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 460 V, 60 Hz		
Date	02/2023	HP / Amps	425 HP / 746 A		
Discharge Flange	16" ANSI, 150lb	Poles / Rated Speed	4P / 1750 rpm		
Solids Size	5 inch	Insulation Class	H Class		
Impeller Type	Enclosed 2-Vane				

	HEAD (FT)	CAPACITY	KILOWATTS [KW]	EFFICIENCY [%]
Best Efficiency Point	222	5000	319	66

