


PUMP SERIES	K2PLSE-SS		1/2HP - 3/4HP 2 VANE SEMI-OPEN IMPELLER	
Speed	3500 RPM	Discharge	2"/3"	FULL IMPELLER

GPM: \_\_\_\_\_ TDH: \_\_\_\_\_

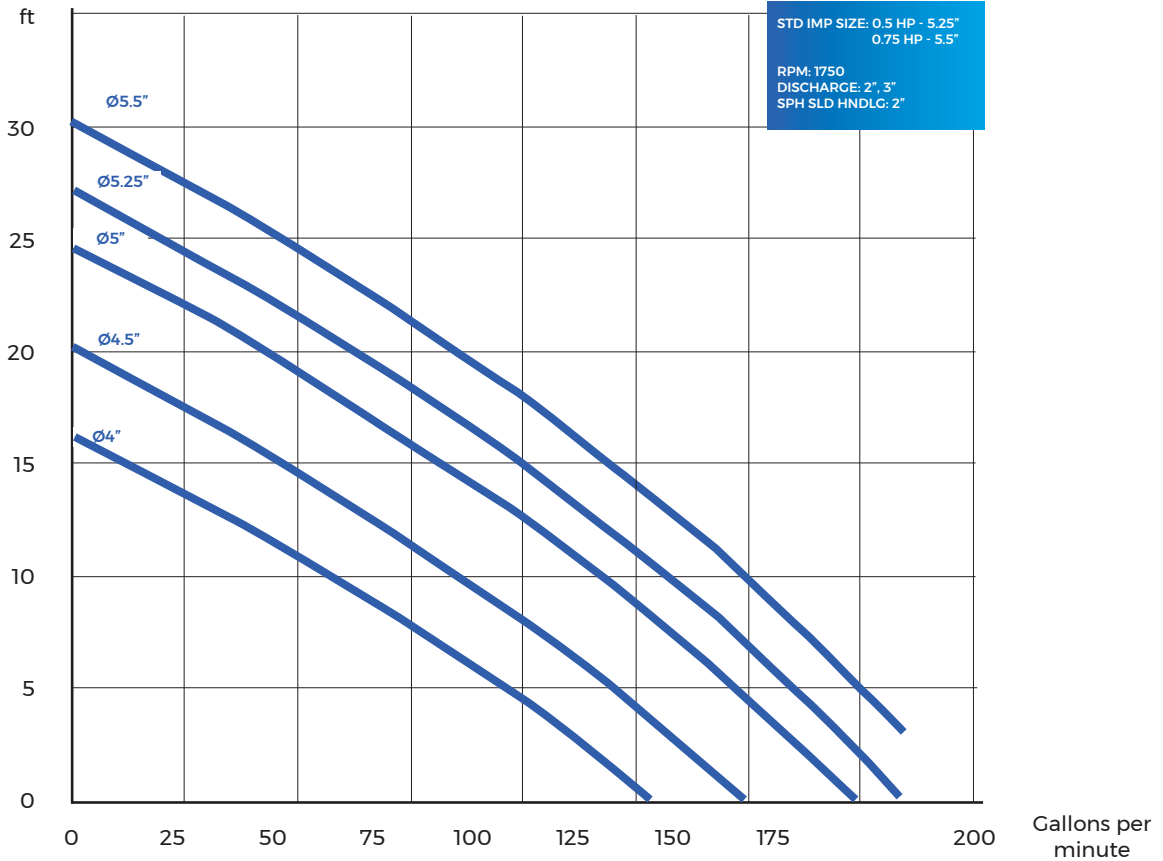

MODEL	HP	VOLTS	PHASE	RPM	MAX AMPS	LOCKED ROTOR AMPS	NEMA CODE	CORD SIZE	CORD TYPE	CORD O.D.	WEIGHT (POUNDS)
K2PLSE51SS	0.5	115	1	1750	11.6	18.4	D	14/3	SJO	0.5"	91
K2PLSE51A	0.5	115	1	1750	11.6	18.4	D	14/3	SJO	0.5"	93
K2PLSE52SS	0.5	200/230	1	1750	5.9	14.9	B	14/3	SJO	0.5"	93
K2PLSE53SS	0.5	200/230	3	1750	4.6/4.2	9.7/11.1	K	14/3	SJO	0.5"	95
K2PLSE54SS	0.5	460	3	1750	2.2	5.3	K	14/3	SJO	0.5"	95
K2PLSE72SS	0.75	230	1	1750	10.5	17.5	D	14/3	SJO	0.5"	95
K2PLSE73SS	0.75	200/230	3	1750	5.5	16	D	12/4	SJO	0.625"	96
K2PLSE74SS	0.75	460	3	1750	3.2	8	D	12/4	SJO	0.625"	96

Available in 2" and 3" discharge - please specify

**IMPORTANT!**

- Never use this pump to handle explosive liquids.
- This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common.
- Pump may be operated "dry" for extended periods without damage to motor and/or seals.
- Testing is performed with water specific gravity of 1.0 @ 68°F (20°C); other fluids may vary performance.