






GENERAL		MOTOR DATA			
Pump Model	K4RC	Volt	230	460	575
		Phase	3	3	3
PUMP DATA		Hz	60 Hz		
Date	09/2022	HP	15, 20, 25, 30 HP		
Discharge Flange	4" ANSI, 150lb	Poles / Rated Speed	2 P / 3450 rpm		
Solids Size	3 inch	Insulation Class	H Class		
Impeller Type	Recessed				

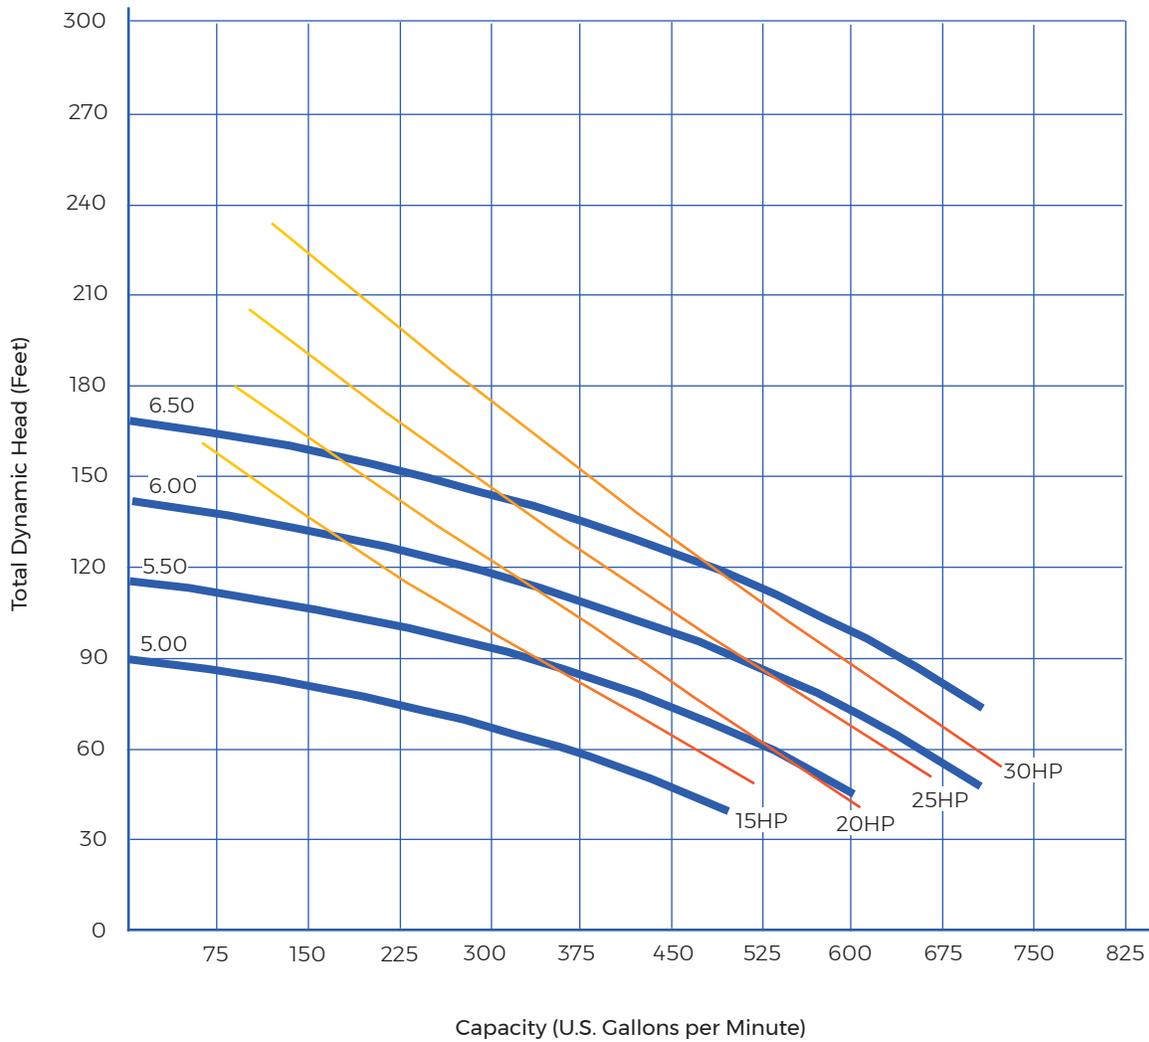

GENERAL		MOTOR DATA			
Pump Model	K4RC150M2-23/43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 230/460 V, 60 Hz		
Date	09/2022	HP / Amps	15 HP/ 52/26 A		
Discharge Flange	4" ANSI, 150lb	Poles / Rated Speed	2 P / 3450 rpm		
Solids Size	3 inch	Insulation Class	H Class		
Impeller Type / Dia.	Recessed/ 5.00" Dia.				



	HEAD (FT)	CAP. [USGPM]	POWER [KW]	EFF. [%]	NPSHRE [FT]
▲ Best Efficiency Point	60	356	16	35	5.7

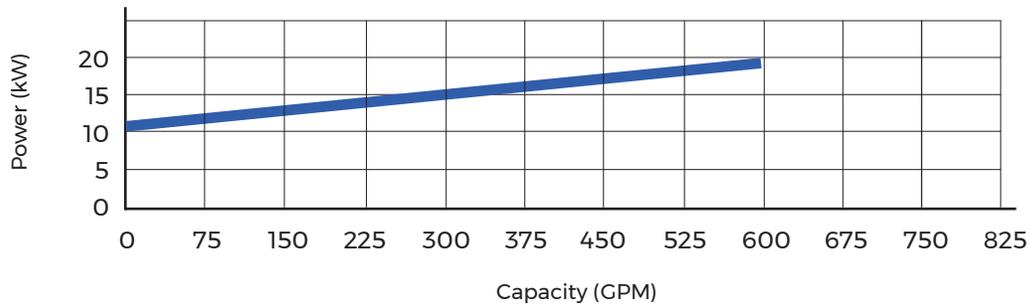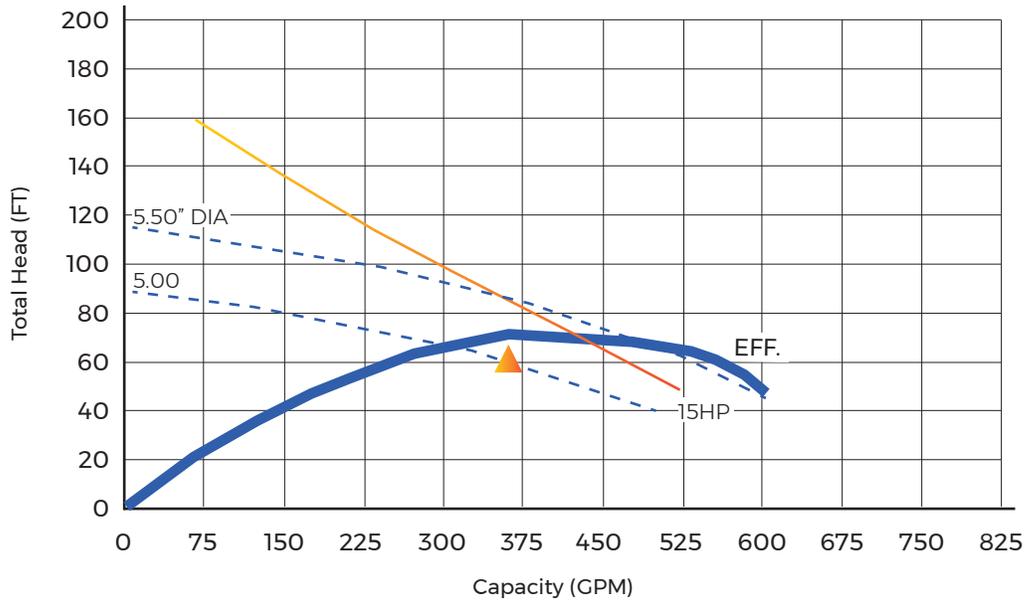





GENERAL		MOTOR DATA			
Pump Model	K4RC200M2-23/43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 φ, 230/460 V, 60 Hz		
Date	09/2022	HP / Amps	20 HP/ 60/30 A		
Discharge Flange	4" ANSI, 150lb	Poles / Rated Speed	2 P / 3450 rpm		
Solids Size	3 inch	Insulation Class	H Class		
Impeller Type / Dia.	Recessed/ 5.60" Dia.				

	HEAD (FT)	CAP. [USGPM]	POWER [KW]	EFF. [%]	NPSHRE [FT]
▲ Best Efficiency Point	78	412	18	38	5.7

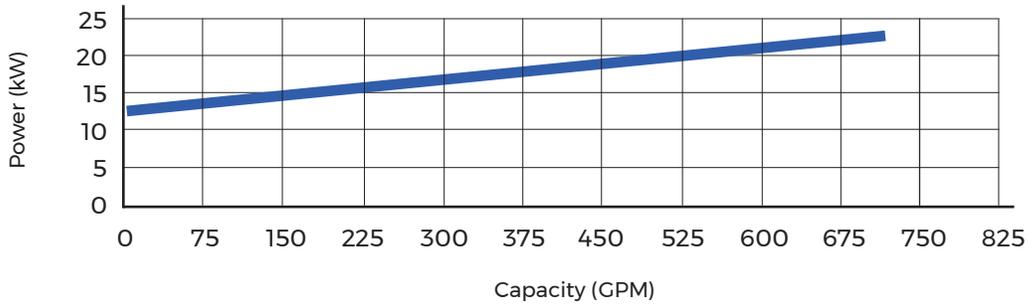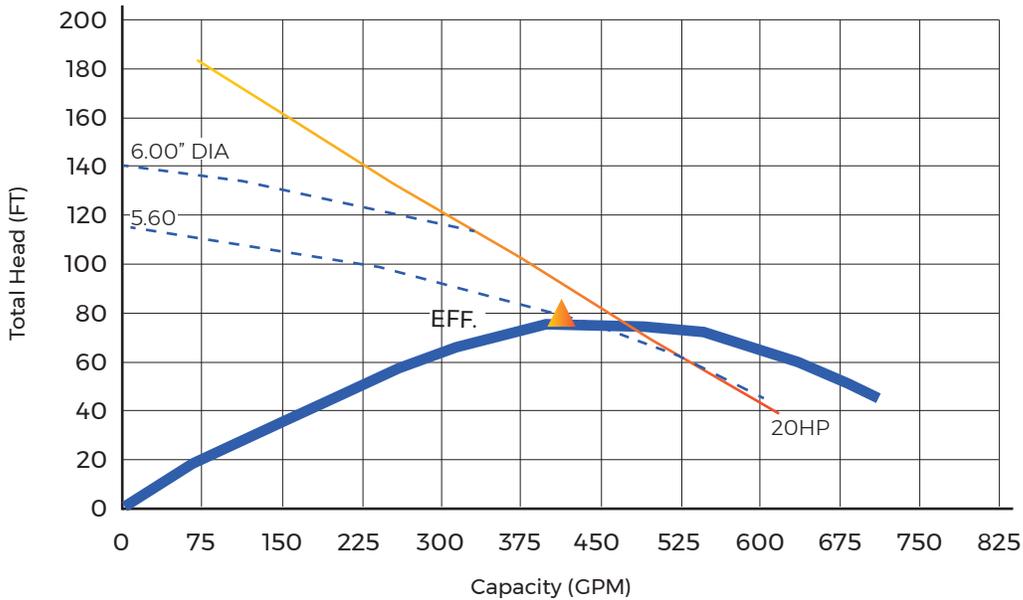

GENERAL		MOTOR DATA			
Pump Model	K4RC250M2-23/43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 230/460 V, 60 Hz		
Date	09/2022	HP / Amps	25 HP/ 84/42 A		
Discharge Flange	4" ANSI, 150lb	Poles / Rated Speed	2 P / 3450 rpm		
Solids Size	3 inch	Insulation Class	H Class		
Impeller Type / Dia.	Recessed/ 6.00" Dia.				

	HEAD (FT)	CAP. [USGPM]	POWER [KW]	EFF. [%]	NPSHRE [FT]
▲ Best Efficiency Point	97	450	24	38	5.7

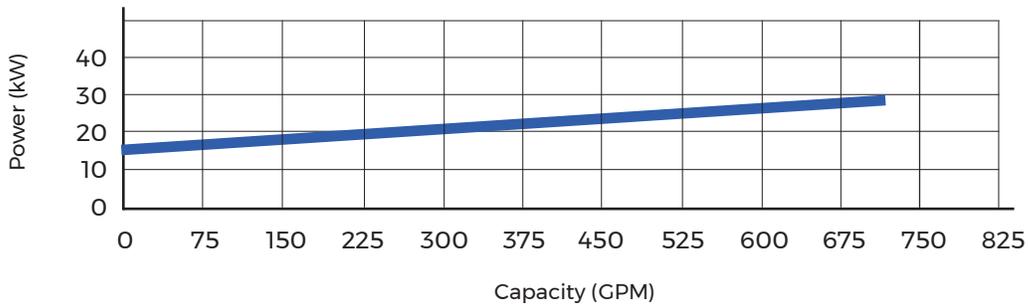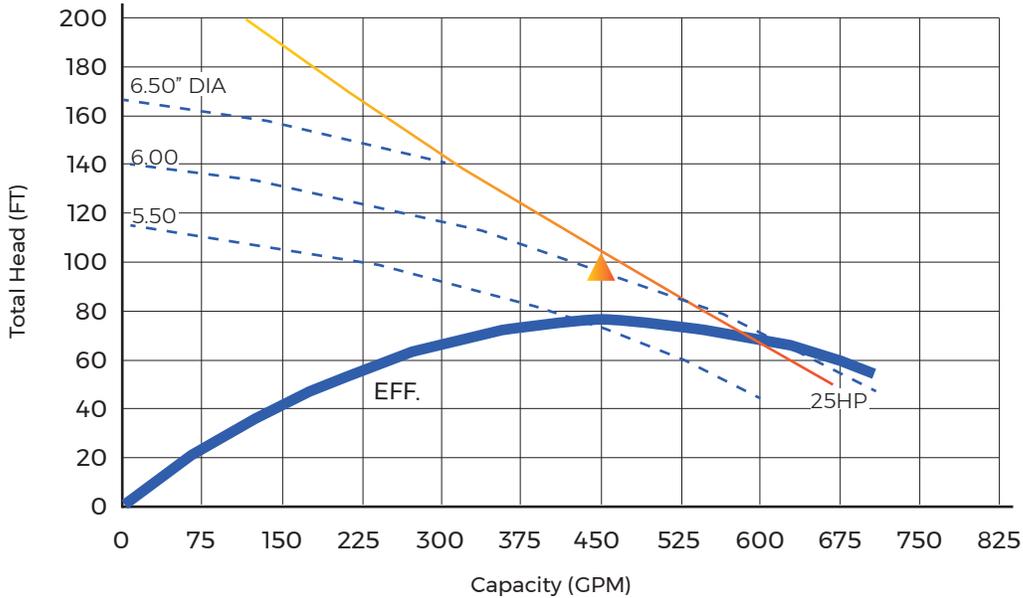



GENERAL		MOTOR DATA			
Pump Model	K4RC300M2-23/43	Load	1/1	3/4	1/2
		Efficiency (%)	85	87	86
PUMP DATA		Power Supply	3 ϕ , 230/460 V, 60 Hz		
Date	09/2022	HP / Amps	30 HP/100/50 A		
Discharge Flange	4" ANSI, 150lb	Poles / Rated Speed	2 P / 3450 rpm		
Solids Size	3 inch	Insulation Class	H Class		
Impeller Type / Dia.	Recessed/ 6.50" Dia.				

	HEAD (FT)	CAP. [USGPM]	POWER [KW]	EFF. [%]	NPSHRE [FT]
Best Efficiency Point	120	470	30	41	5.7

