



KL8-C


KEEN 8" Horizontal Liftout

- 8" Class 125 ANSI Flange (Pump Connection Discharge)
- 2" or 3" Guide Rails
- Rated for Pumps up to 4,000 lbs.
- Metal-to-Metal Design with SST Breakaway Ring

- Base elbow provides quick and easy installation and removal of horizontal discharge Pumps up to 4000 lbs.
- Taper-base design supports liftout elbow and pump
- Standard with SST Break-away Ring
- Rugged Ductile Iron Construction with Durable Powder Coating



NOTE: ALL DIMENSIONS ARE IN INCHES.
 MATERIALS OF CONSTRUCTION:
 BASE ELBOW: CAST DUCTILE IRON
 LIFT-OUT FLANGE: CAST DUCTILE IRON
 W/SST SEALING RING
 LOWER GUIDE BRACKET: CAST DUCTILE IRON
 ALL FASTENERS ARE 304 SERIES SST
 USEABLE GUIDE RAIL SIZES: 2" & 3"
 SPHERICAL SOLIDS SIZE: 7-7/8" Diameter.
 MAXIMUM WEIGHT ALLOWANCE: 4000lbs.

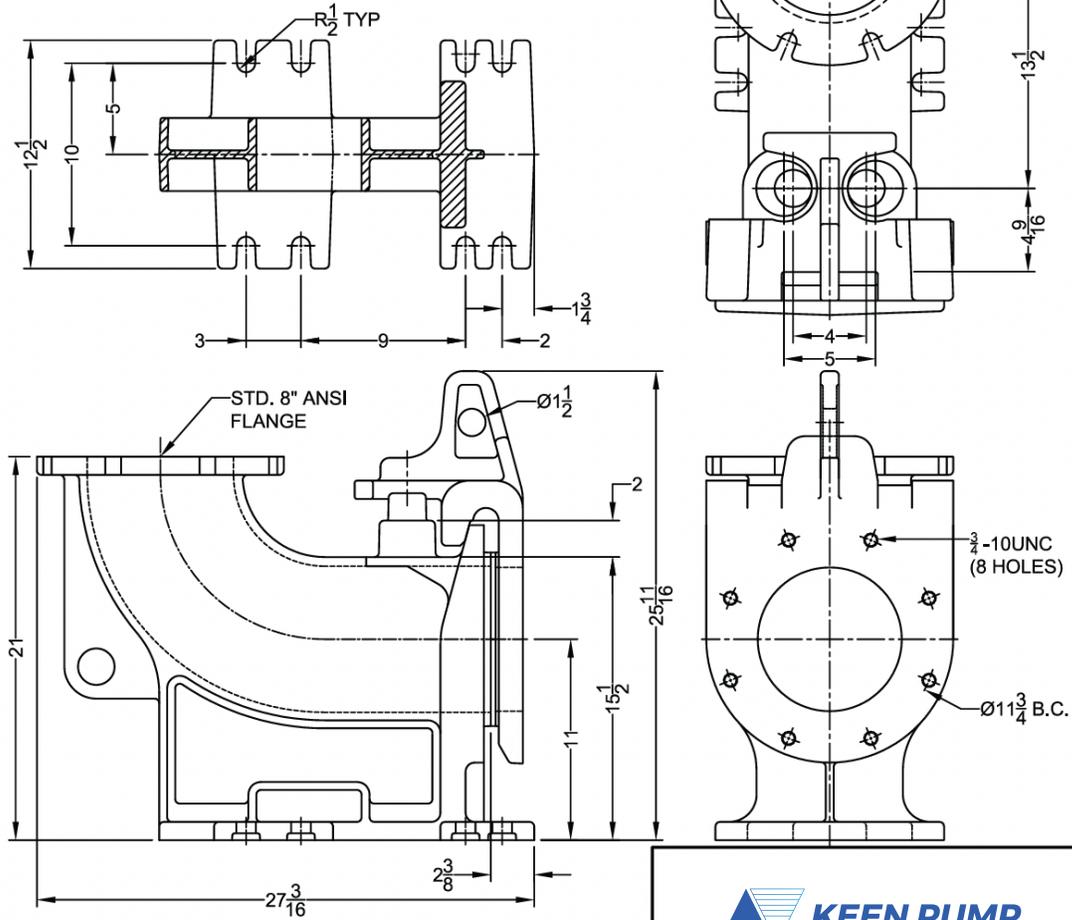

CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005 .xx = ±.010	SE	02/29/16
E	FRACTIONAL x/x = ±.1/64 ANGLES x = ±1/2	MATERIAL SPECIFICATION:	
D		AS NOTED	
C			
B			
A			

LIFT-OUT, 8"
SPECS/CUT SHEET

SCALE: PART NO.

1/8

KL8-C