




PUMP SERIES		KW-52		10 VANE IMPELLER	
Speed	3450 RPM	Discharge	2"	STANDARD FLOW	

PERFORMANCE

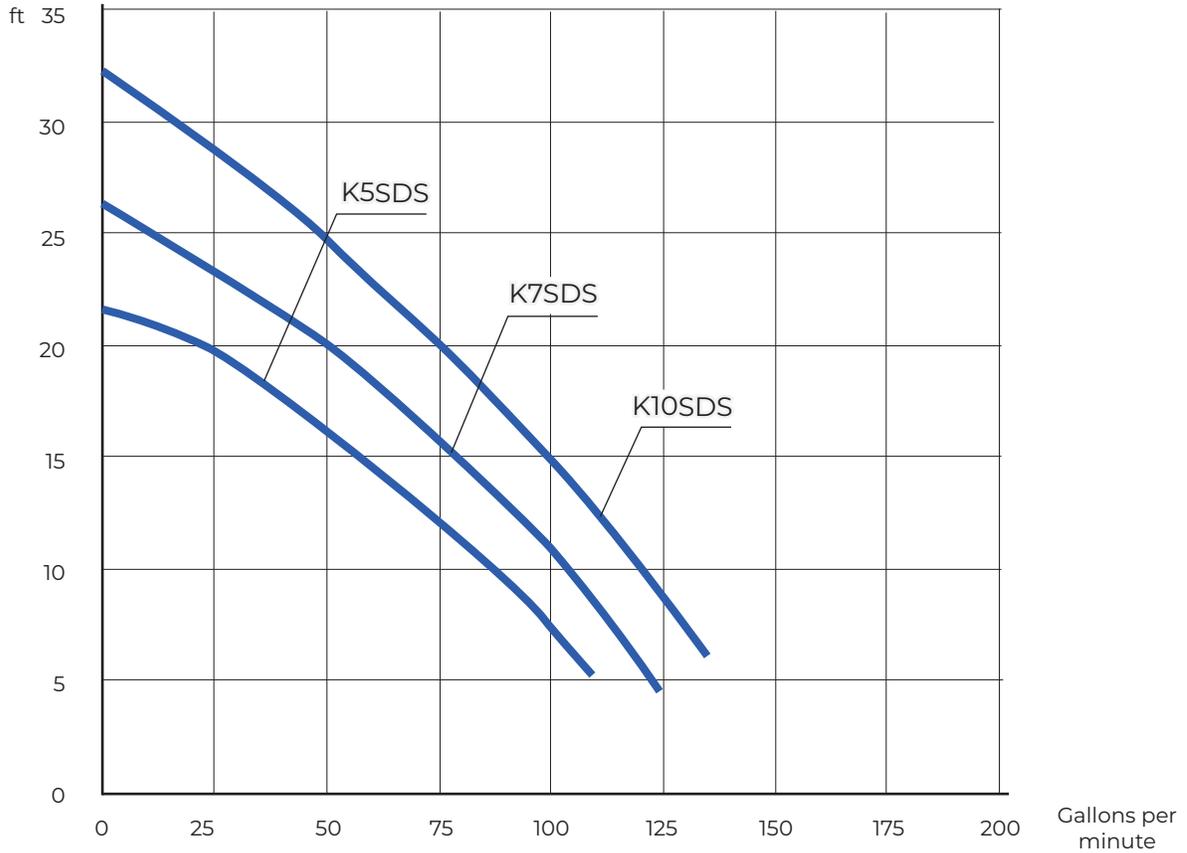

MODEL	HP	VOLTS	PHASE	RPM	FULL LOAD AMPS	LOCKED ROTOR AMPS	CORD SIZE	CORD TYPE	WEIGHT (POUNDS)
K5SDS	0.5	115/127	1/60	3450	10	37	14/3	SJTOW	57
K7SDS	0.75	115/127	1/60	3450	12	45	14/3	SJTOW	58
K10SDS	1	115/127	1/60	3450	15	45	14/3	SJTOW	59

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.